



MD591 Suretred Rhombus Rubber matting


...the choice matters

www.matsdirect.co.uk

A Premium grade Rubber matting with a safe non slip pattern. Excellent anti-slip characteristics for applications involving excessive amounts of water and liquids.

Attractive and hard wearing Rhombus is ideal for steep or inclined areas especially walkways also excellent on boats, ships or any marine environments.

For use indoor or outdoor applications, can be stuck or loose laid on any stable substrates.

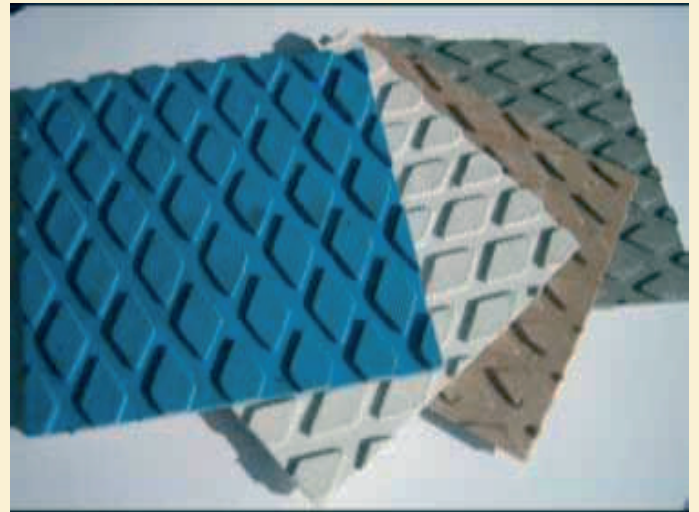

Hardness:	70
Density SG:	1.4
Tensile Strength:	4.0Mpa
Elongation:	150%
Abrasion Resistance	200mm3
Temperature Range	-20/+70degrees C

Thickness:(mm)	3.5
Roll size (10m x 1m):	EX STOCK
Weight/ M2 (kgs- appx):	3.4
Colours:	Black,Blue,Beige, Grey, White.

MD591 Rhombus Matting Performance.

- Aesthetically pleasing and decorative.
- Extremely hard wearing and colour fast.
- Comfortable for long standing periods.
- Secure safe underfoot and anti slip.

Colour Fastness

To sunlight, general cleaning and remedial treatment.

Cleaning and Maintenance Daily:

Daily: Vacuum clean, wet mop or stiff brush.

Spot Clean: Wet mop with neutral detergent. Warm water rinse.

Periodic: Deep clean with high pressure water using a neutral detergent and warm water rinse.

MatsDirect UK Ltd
 Unit 2 Bolholt Industrial Park
 Bury
 Lancashire
 BL8 1PL UK

For all enquires:

Tel: 0044 (0)161 797 6785
Fax: 0044 (0)161 797 6349
E-mail: sales@matsdirect.co.uk